

Machine height: 2500 mm (Ops. 3000 mm)


Max. pallet dimensions:

(Y) 2200 mm Opt: 2700 mm x (G) 1200 mm x 1200 mm

4 wrapping programs

- 1- Standart wrapping (Up & Down)
- 2- Only wrapping up
- 3- While wrapping, waiting on the top of the pallet to cover sheet etc. for upper protection.
- 4- The one-way version of the third program that only goes up

- PLC System – Touch Screen
- Motorized pre-stretch system
- Loading capacity max.1100 kg
- Elevator up-down speed adjustment
- Starting and standart tension rate adjustment
- Adjustable turntable speed
- Initial and standard stretch film tension setting
- Able to work on manual mode
- Film roll diameter 250 mm, Film roll inner diameter 76 mm, Film roll width 500 mm,
- Inverter for soft start and stop
- Colour: Ral 7040-5002 (Gray-Blue)
- Turntable speed adjust between 7-12 rpm
- Stop at starting point
- The feature of determining the number of pallet up-down turns
- Power requirement: 220V 50 Hz 1 ph
- Installed power: 1,4 kW
- Operator panel in 6 different languages (Turkish, English, German, French, Spanish, Arabic)
- CE certification
- Made in Turkiye

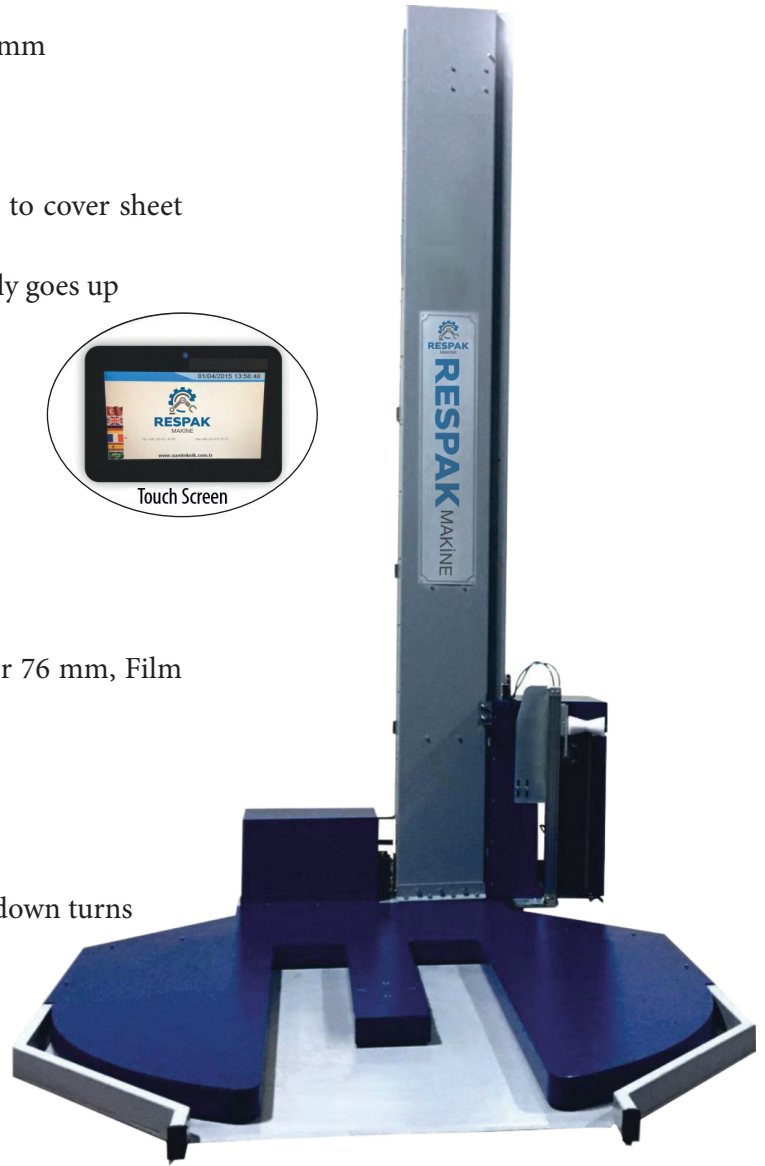

STRETCH MACHINE OPTIONS



Cutting Unit: Binding film and cutting automatically.



Top Press: While wrapping; products that are likely to fall are fixed by pressure from the piston or motor, preventing possible damage.



Pre-stretch with motor:
Using pre-stretch with motor, from 50% up to 400% savings using Super Power stretch film



RIP Application: By turning the stretch film into a rope, it prevents the risk of overturning the products.